


Low-Head Type

Hoist With Motor-Driven Trolley(HL)

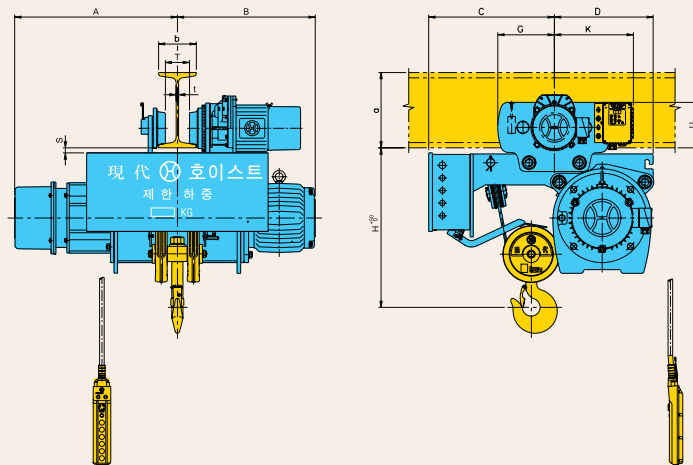

Capacity (ton)				1			2			2.8, 3			5			
Hoist	Lift Height(m)			6			6			6			6			
	Hoisting Speed (m/min)	High Speed	50Hz	10			8.3			7.5			4.7			
			60Hz	12			10			9			5.6			
		Low Speed	50Hz	6.7			5			3.8			3.5			
			60Hz	8			6			4.5			4.2			
	Hoisting Motor (kW×P)	High Speed		2.2×4			3.7×4			5.5×4			5.5×6			
		Low Speed		1.5×6			2.5×6			2.8×8			4.2×8			
	Wire Rope	Construction			6×19			6×24			6×37			6×37		
		Dia. (mm) ×No. of ropes			6×4			8×4			9×4			12.5×4		
Brake				DC magnet disc												
Traversing	Traversing Speed (m/min)	High Speed	50Hz	20			20			20			20			
			60Hz	24			24			24			24			
		Low Speed	50Hz	13.3			13.3			13.3			13.3			
			60Hz	16			16			16			16			
	Traversing Motor (kW×P)	High Speed		0.75×4			0.75×4			0.75×4			0.75×4			
		Low Speed		0.5×6			0.5×6			0.5×6			0.5×6			
	Brake				DC magnet disc											
	Dimension (approx.) (mm)	H			550			570			585			760		
A			564			624			647			732				
B			479			552.5			548			623				
C			423			440			499			582				
D			320			375			393			465				
G			212			225			225			275				
K			304			314			314			349				
I-beam and Spacing (mm)	a×b×t			S	T	U	S	T	U	S	T	U	S	T	U	
	200×100×7			35	48	144	35	46	170	35	46	170	—	—	—	
	250×125×7.5			33	73	146	33	71	172	33	71	172	40	60	216	
	300×150×10			27	98	152	27	96	178	27	96	178	34	85	222	
	450×175×13			—	—	—	—	—	—	—	—	—	26	110	230	
Min. radius of curvature(m)				1.5			1.8			1.8			2.3			
Weight (approx.) (kg)				210			338			424			662			

Note : 상기 이외 비표준 사양은 당사로 문의 바랍니다. Please contact us for the hoist other than above listed specification.