


Electric Wire Rope Hoist

Double Rail Type

Hoist With Motor-Driven Trolley(HD)

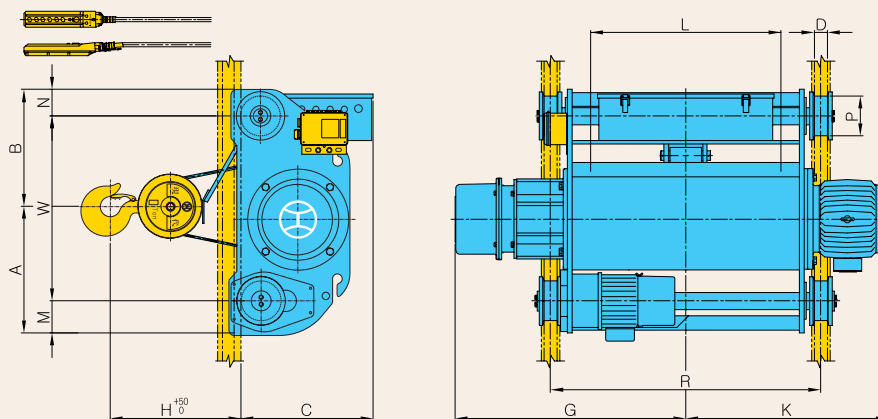


Capacity (ton)				2	2.8, 3	5	7.5	10	15	20	30	
Hoist	Lift Height(m)			12	12	12	12	12	12	12	12	
	Hoisting Speed (m/min)	High Speed	50Hz	8.3	7.5	4.7	3.2	5	3.8	3.5	2.3	
			60Hz	10	9	5.6	3.8	6	4.5	4.2	2.8	
		Low Speed	50Hz	5	3.8	3.5	2.4	3.8	2.5	2.3	1.5	
			60Hz	6	4.5	4.2	2.9	4.5	3	2.8	1.8	
	Hoisting Motor (kW×P)	High Speed		3.7×4	5.5×4	5.5×6	5.5×6	13×6	13×8	17×8	17×8	
		Low Speed		2.5×6	2.8×8	4.2×8	4.2×8	9×8	8.5×12	11.5×12	11.5×12	
	Wire Rope	Construction			6×24	6×37	6×37	6×37	6×Fi(25)	6×Fi(25)	6×37	6×37
		Dia. (mm) ×No.of ropes			8×4	9×4	12.5×4	14×4	14×4	18×4	22.4×4	22.4×6
Brake				DC magnet disc								
Traversing	Traversing Speed (m/min)	High Speed	50Hz	20	20	20	20	13.3	12.5	12.5	12.5	
			60Hz	24	24	24	24	16	15	15	15	
		Low Speed	50Hz	13.3	13.3	13.3	13.3	8.3	8.3	8.3	8.3	
			60Hz	16	16	16	16	10	10	10	10	
	Traversing Motor (kW×P)	High Speed		0.75×4	0.75×4	0.75×4	0.75×4	0.75×4	1.5×4	1.5×4	1.5×4(2Units)	
		Low Speed		0.5×6	0.5×6	0.5×6	0.5×6	0.5×6	1×6	1×6	1×6(2Units)	
	Brake				DC magnet disc							
	Dimension (approx.) (mm)	H			420	420	510	730	750	995	1175	1480
		R			950	950	1150	1150	1150	1200	1300	1800
A			445	445	526	520	581	625	710	930		
B			410	410	474	480	509	555	615	970		
C			457	466	522	509	623	742	796	825		
G			776	811	961	961	1000	1076	1179	1439		
K			705	712	852	852	953	1128	1184	1444		
W			650	650	763	758	865	920	1000	1540		
D			47	47	47	47	58	58	58	70		
L			728	724	896	894	865	872	936	1456		
M(N)			112(93)	112(93)	135(102)	130(112)	125(100)	130(130)	185(140)	185(175)		
P			140	140	165	165	165	180	220	250		
Weight (approx.)(kg)				455	524	812	940	1218	1850	2580	3950	
Rail				15kg/m	15kg/m	15kg/m	15kg/m	15kg/m	22kg/m	22kg/m	30kg/m	

Note : 상기 이외의 비표준 사양은 당사로 문의 바랍니다. Please contact us for the hoist other than above listed specification.

Double Rail Type

Hoist With Motor-Driven Trolley(HD)

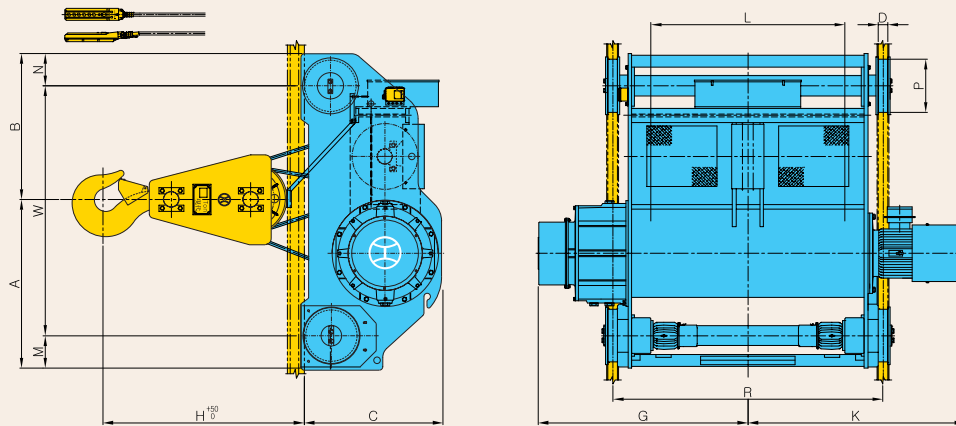

Capacity (ton)		35	40, 50	60	70
Hoist	Lift Height(m)	12	12	12	12
	Hoisting Speed (m/min)	50Hz	4	2.7	2
		60Hz	4.8	3.2	2.4
	Hoisting Motor (kW×P)		33×6	33×6	33×6
	Wire Rope	Construction	6×Fi(25)	6×Fi(25)	6×Fi(25)
		Dia.(mm)×No.of ropes	28×4	28×6	28×8
Traversing	Brake		DC magnet disc		
	Traversing Speed (m/min)	High Speed	50Hz	12.5	12.5
		60Hz	15	15	15
		Low Speed	50Hz	8.3	8.3
		60Hz	10	10	10
	Traversing Motor (kW×P)	High Speed	2.2×4	2.2×4(2Units)	2.2×4(2Units)
		Low Speed	1.5×6	1.5×6(2Units)	1.5×6(2Units)
Dimension (approx.) (mm)	Brake		DC magnet disc		
	H		1490	1680	1780
	R		1600	2300	2800
	A		1025	1432	1407
	B		955	1243	1268
	C		1028	1180	1205
	G		1458	1783	2033
	K		1520	1845	2095
	W		1550	2125	2075
	L		1020	1648	2002
	M(N)		215(215)	275(275)	300(300)
	P		355	450	500
	D		70	80	80
Weight (approx.) (kg)		5200	7000	9000	9000
Rail		37kg/m	50kg/m	50kg/m	50kg/m

Note : 상기 이외 비표준 사양은 당사로 문의 바랍니다. Please contact us for the hoist other than above listed specification.